EN: CAMIPRO – USER MANUAL

Please read this manual carefully before use to ensure proper operation of all product functions. Keep this manual for future reference.

Product parameters

Input rating: 5V/1A, 5W

Battery: Li-ion 3.7V, 400mAh, 1.48Wh

Frequency band(s): 2.4 GHz


Maximum radio-frequency power: 16 dBm

Dimensions: $82 \times 26 \times 19 \text{ mm}$

Weight: 23 g Video format: AVI Audio format: WAV

Product Introduction

Note: The product appearance may differ slightly from the illustrations.

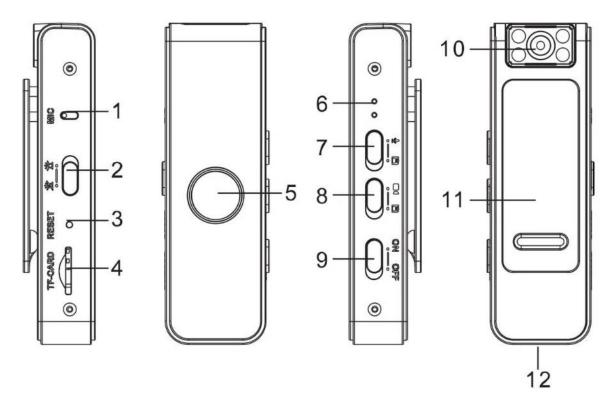

- 1. Microphone
- 2. Night vision switch
- 3. Reset hole
- 4. TF card slot
- 5. Magnetic back
- 6. Indicator lights (upper: video recording, lower: audio recording)
- 7. Record/Save key

- 8. Record/Save key
- 9. Power on/off key
- 10. Rotating lens
- 11. Front/back clip
- 12. USB interface

Power On/Off

Push the switch upward to "Start" (the blue light turns on). Push downward to "Shutdown" (the blue light turns off).

Video Recording (Saved in VIDEO Folder)

Turn on the device (blue light on). Push the video key to the **"Video"** position. The blue light will flash 5 times, then turn off, and recording will begin.

- Each video segment is automatically saved every 10 minutes. Recording continues automatically.
- You can push the key to the "Save" position at any time to pause recording.

Audio Recording (Saved in AUDIO Folder)

Turn on the device (blue light on). Push the record key to the "Record" position. The red light will flash 5 times, then turn off, and recording will begin.

- Each audio segment is automatically saved every 30 minutes. Recording continues automatically.
- You can push the key to the "Save" position at any time to pause recording.

Charging

Connect the data cable to the USB port of the device and the other end to a power source.

- During charging: the blue light stays on and the red light flashes.
- When fully charged: both the blue and red lights remain on.
- Charging time: approximately 2 hours.

Infrared Night Vision

The infrared night vision function can be enabled in low-light environments. Push the night vision button to "On" to activate night vision. Push it to "Off" to deactivate.

Connecting to a PC

Connect the device to a computer with a data cable, or remove the memory card and insert it into a card reader. After a few seconds, the computer will recognize the device as a "Removable Disk" or "U Disk."

- Video files are stored in the VIDEO folder.
- Audio files are stored in the **AUDIO** folder.

Modifying the Time (time.txt)

- 1. Insert the TF card into the device, then connect the device to the computer. A removable disk will appear.
- 2. Open the disk. Locate the file named time.txt.
- 3. Open the file. A time format will appear (do not change the format—only adjust the numbers).
 - Example without watermark: 2022-01-01 01:01:01 N
 - Example with watermark: 2022-01-01 01:01:01 Y
- 4. The default setting is **N** (no time watermark). Change **N** to **Y** to enable the time watermark.
- 5. After editing, click **File > Save**. Safely remove the device from the computer. The new time setting is now applied.

Statement

- Specifications may vary. The product specifications and information in this manual are for
 reference only. The company reserves the right to update or modify software, hardware, and
 instructions.
- **Data backup is the user's responsibility.** Please back up all data during use. The company is not responsible for data loss.
- **Battery safety.** This product contains a polymer battery. Do not throw it into fire (risk of explosion). Do not immerse in water (not waterproof).
- Legal use. Please use this product within the limits of applicable laws. Do not use it for illegal purposes. The company is not responsible for disputes or consequences arising from unlawful use.
- **Storage capacity.** System software occupies part of the storage space. Actual capacity may differ from the nominal value.

APP Installation

Scan the QR code below with your mobile phone to download and install the application.

Software name: YsxLite





Connection Method 1: Without Internet Connection

- 1. Connect to the camera's built-in hotspot. The hotspot name begins with **BAT**. Select it and tap **Connect**.
- 2. Once the connection is successful, return to the app.





Α

В



C




D

- A. Open the system Wi-Fi settings.
- B. Select the Wi-Fi network beginning with **BAT**.
- C. After connecting, follow the on-screen instructions. When the connection is confirmed, tap Screen Viewing.
- D. You can now watch live video from the camera.

Note: Without an internet connection, remote monitoring is not possible. You can only view the video when your phone is within about 4 meters of the camera. To enable remote monitoring, follow the steps under Connection Method 2.

Connection Method 2: With Internet Connection

- 1. Connect to the camera's built-in hotspot. The hotspot name begins with BAT. Select it and tap Connect.
- 2. Once the connection is successful, return to the app.
 - A. Open the system Wi-Fi settings.
 - B. Select the Wi-Fi network beginning with **BAT**.
 - C. Locate your home Wi-Fi network, enter the password correctly, and tap **OK** to return.
 - D. In the app, tap the **Settings (gear) icon**.
 - E. Select Wi-Fi Settings, then choose your home Wi-Fi and enter the password.

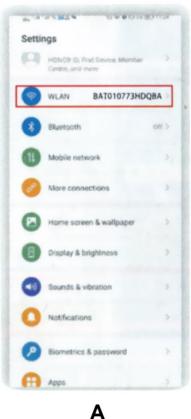



В







3. After returning to the app, wait until the connection is confirmed. Once successful, tap the **Play** button to view the live screen. Remote monitoring is now enabled.





Note: The camera will connect successfully as long as the Wi-Fi password is correct. If the connection fails, delete (forget) the saved router password, confirm that the password is correct, and try again.

INSTRUCTIONS FOR RECYCLING AND DISPOSAL:



This label means that the product cannot be disposed of as other household waste throughout the EU. To prevent potential damage to the environment or human health from uncontrolled waste disposal. Recycle responsibly to promote the sustainable use of material resources. If youwant to return a used device, use the drop-off and collection system, or contact the retailer from whom you bought the product. The retailer can accept the product for environmentally safe recycling.



A declaration by the manufacturer that the product complies with the requirements of the applicable EU Directives.